


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
4	2.54	5.08	○
6	5.08	7.62	○
8	7.62	10.16	○
10	10.16	12.70	○
12	12.70	15.24	○
14	15.24	17.78	○
16	17.78	20.32	○
18	20.32	22.86	○
20	22.86	25.40	○
22	25.40	27.94	○
24	27.94	30.48	○
26	30.48	33.02	○
28	33.02	35.56	○
30	35.56	38.10	○
32	38.10	40.64	○
34	40.64	43.18	○
36	43.18	45.72	○
38	45.72	48.26	○
40	48.26	50.80	○
42	50.80	53.34	○
44	53.34	55.88	○
46	55.88	58.42	○
48	58.42	60.96	○
50	60.96	63.50	○
52	63.50	66.04	○
54	66.04	68.58	○
56	68.58	71.12	○
58	71.12	73.66	○
60	73.66	76.20	○
62	76.20	78.74	○
64	78.74	81.28	○
66	81.28	83.82	○
68	83.82	86.36	○
70	86.36	88.90	○
72	88.90	91.44	○
74	91.44	93.98	○
76	93.98	96.52	○
78	96.52	99.06	○
80	99.06	101.6	○

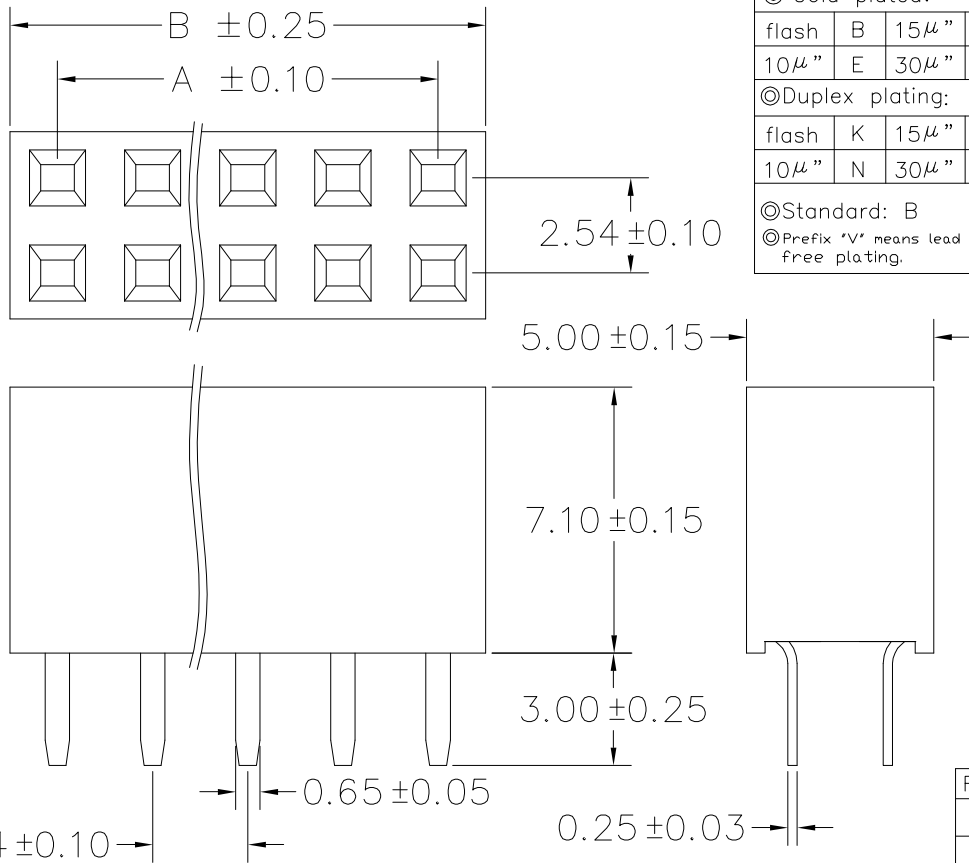

PGFZ-XXS-X-030-\*  
 Number of Contacts  
 Straight  
 Contact Plating

NULL: TRAY  
 G: TUBE

Definition	Code
◎ Tin plated:	A
◎ Gold plated:	
flash B	15μ" F
10μ" E	30μ" J
◎ Duplex plating:	
flash K	15μ" P
10μ" N	30μ" U
◎ Standard: B	
◎ Prefix 'V' means lead free plating.	


**SPECIFICATIONS**

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms min.  
 Contacts resistance: 20 m ohms max.  
 Dielectric withstanding: AC 1000 V  
 Operating Temperature: -40~+105°C  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 ◎Standard: Nylon-6T

Finish: Tin, Gold or Duplex plated  
 Standard: Gold flash all over

◎ Note:  
 ◎ Duplex plating: gold plated on contact area, Tin on solder area

Recommended P.C.Board Hole Layout



Rev.	ECN Number	Description	Drawn	Date
2	EC2-570143	套用新圖框	詹益東	07/28/05'



GENERAL TOLERANCE	
XX. ± 0.40	XXX. ±
X. ± 0.25	.XXX ±
.X ± 0.15	X. ± 3°
.XX ± 0.10	.X. ± 3°

SCALE	1=1
UNIT	MM
SIZE	A4

DRAWN	邱若婷	DATE	09-05-03'
CHECK	林錫錦	DATE	07/28/05'
APPROVE	林錫錦	DATE	07/28/05'

DWG. NO.	F:\DWG\CDWG\PGF\PGFZS0E.DWG
PARTS NO.	PGFZ-XXS-X-030-*

TITLE	成品規格圖
-------	-------

REV.	2
SHEET	1/1