

No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
6	2.54	4.31	○
8	3.81	5.58	○
10	5.08	6.85	○
12	6.35	8.12	○
14	7.62	9.39	○
16	8.89	10.66	○
18	10.16	11.93	○
20	11.43	13.20	○
22	12.70	14.47	○
24	13.97	15.74	○
26	15.24	17.01	○
28	16.51	18.28	○
30	17.78	19.55	○
32	19.05	20.82	○
34	20.32	22.09	○
36	21.59	23.36	○
38	22.86	24.63	○
40	24.13	25.90	○
42	25.40	27.17	○
44	26.67	28.44	○
46	27.94	29.71	○
48	29.21	30.98	○
50	30.48	32.25	○
52	31.75	33.52	○
54	33.02	34.79	○
56	34.29	36.06	○
58	35.56	37.33	○
60	36.83	38.60	○
62	38.10	39.87	○
64	39.37	41.14	○
66	40.64	42.41	○
68	41.91	43.68	○
70	43.18	44.95	○
72	44.45	46.22	○
74	45.72	47.49	○
76	46.99	48.76	○
78	48.26	50.03	○
80	49.53	51.30	○
82	50.80	52.57	○
84	52.07	53.84	○
86	53.34	55.11	○
88	54.61	56.38	○
90	55.88	57.65	○
92	57.15	58.92	○
94	58.42	60.19	○
96	59.69	61.46	○
98	60.96	62.73	○
100	62.23	64.00	○

Diagram	Molding description
○	mass production & assemble mold
◎	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold




GENERAL TOLERANCE		SCALE
XX. ± 0.50	XXX. ±	1=1
X. ± 0.30	.XXX ±	UNIT MM
.X ± 0.25	.X* ± 4*	SIZE A4/X
.XX ± 0.20	.X* ± 4*	◎ ◻

ORIGINAL DRAWN	DATE
江尚元	26-06-02'
江坤容	11/11 04'
林錫錦	11/11 04'


DWG. NO.	PARTS NO.
F:\DWG\CDWG\SPNAF2\SPNAF0A.DWG	SPNAF-XX-X-X-X-*

Rev.	ECN Number	Description	Drawn	Date
2	DOC9306208	新增100 PIN	王佩云	11/06/04'
3	ECR-480048	新增電鍍選項	洪銀雲	08/18/04'
4	ECR-4B0062	材質變更, 變更為共用圖 SPNAF-XX-X-X-X-*	陳美竹	11/11 04'

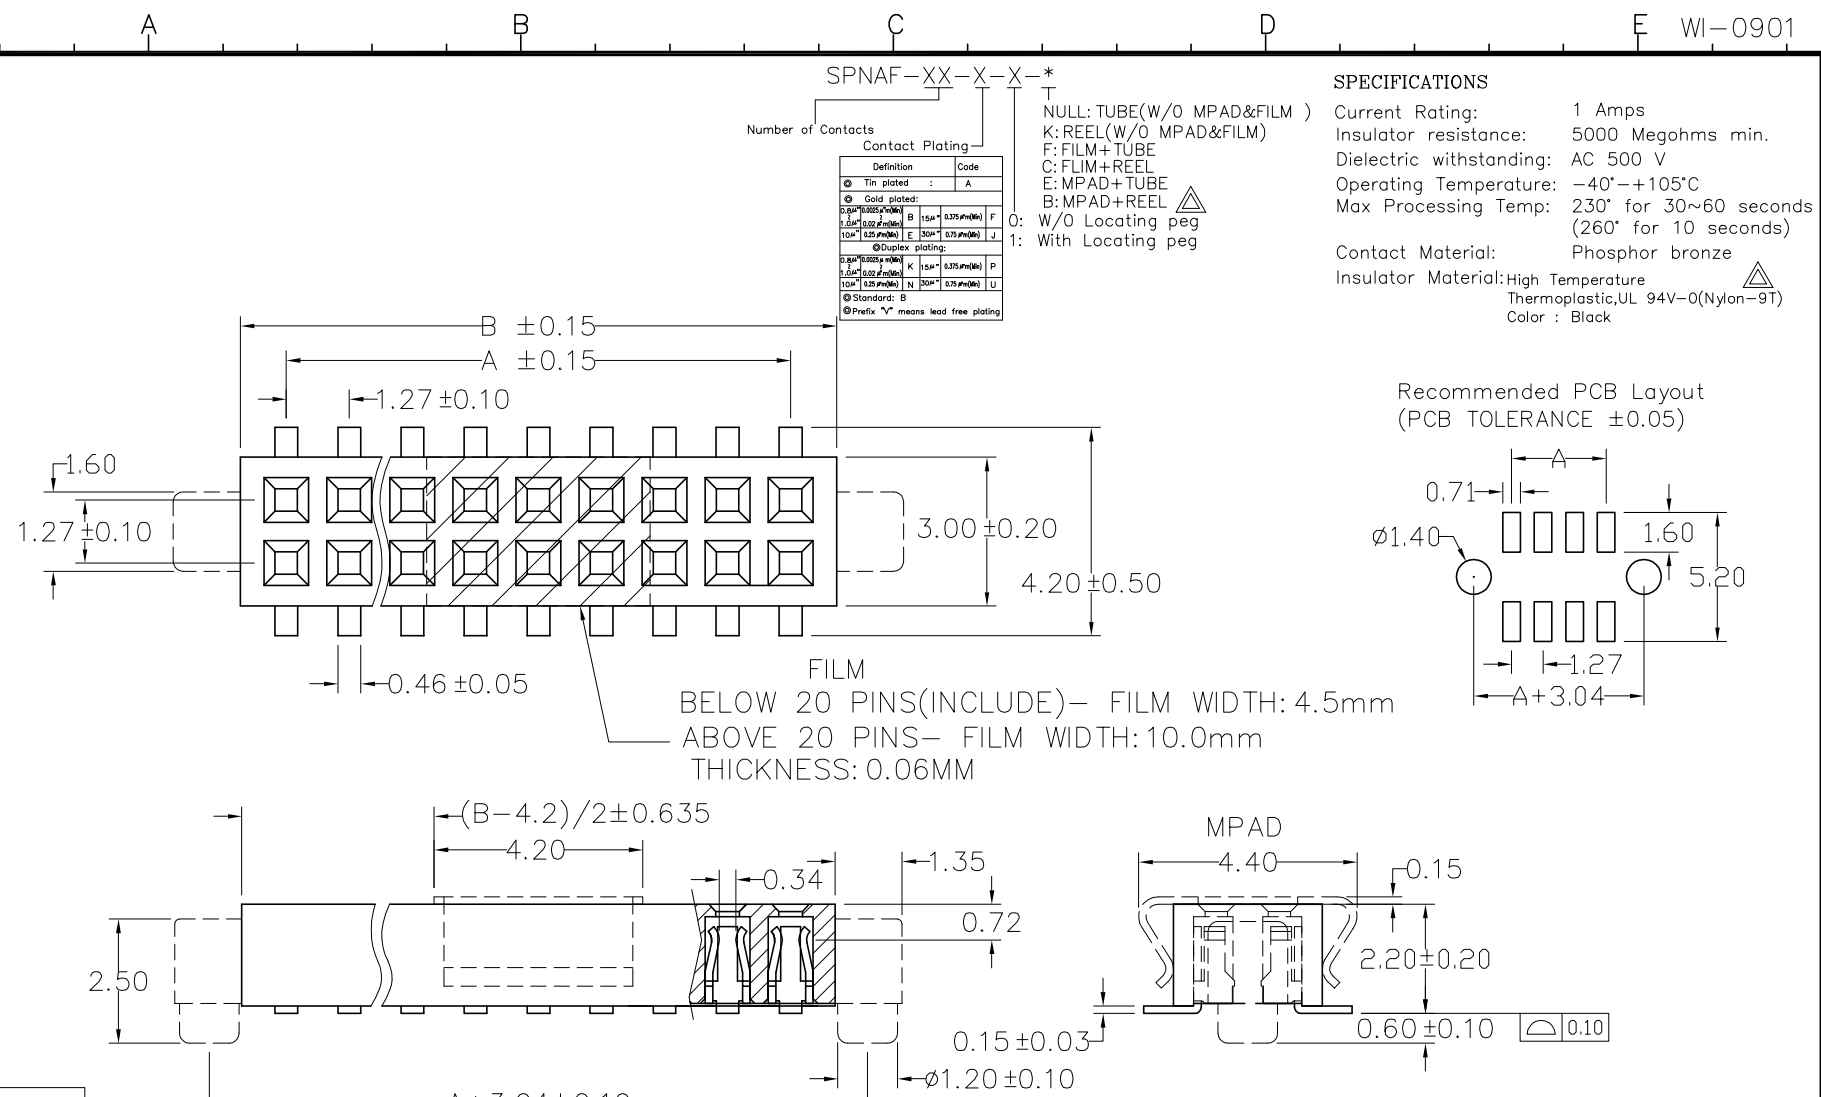

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°~+105°C
 Max Processing Temp: 230° for 30~60 seconds (260° for 10 seconds)
 Contact Material: Phosphor bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0(Nylon-9T)
 Color: Black

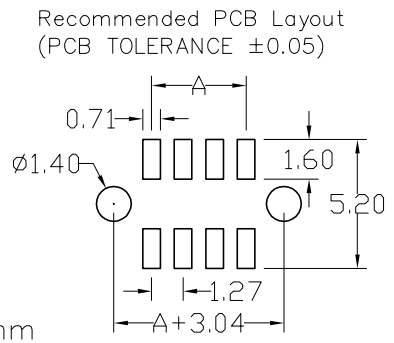

FILM
 BELOW 20 PINS(INCLUDE)- FILM WIDTH: 4.5mm
 ABOVE 20 PINS- FILM WIDTH: 10.0mm
 THICKNESS: 0.06MM

