

No. of Contacts	DIMENSIONS					REMARK W/O Locating Peg	REMARK With Locating Peg
	A	B	C	D	E		
20	7.10	4.50	5.20	5.60	6.60		⊕
30	9.60	7.00	7.70	8.10	9.10		
32	10.10	7.50	8.20	8.60	9.60		
36	11.10	8.50	9.20	9.60	10.60		⊕
40	12.10	9.50	10.20	10.60	11.60		
50	14.60	12.00	12.70	13.10	14.10		⊕
60	17.10	14.50	15.20	15.60	16.60		⊕

Diagram	Molding description
○	mass production & assemble mold
⊙	sample & assemble mold
⊕	mass production & fix mold
⊗	sample & fix mold

Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Finish: selective Gold plated, over 50μ" Ni underplated.


ZVG-XXS1-X-X-*

Number of Contacts

0: W/O Plastic Peg
 1: With Plastic Peg
 Contact Plating

NULL: TUBE (W/O FILM)
 K: REEL (W/O FILM)
 C: FILM+REEL
 F: FILM+TUBE

Definition	Code
⊕ Gold plated:	
flash B 15μ" F	
30μ" E	
⊙ Standard: B	
⊗ Prefix "V" means lead free plating	

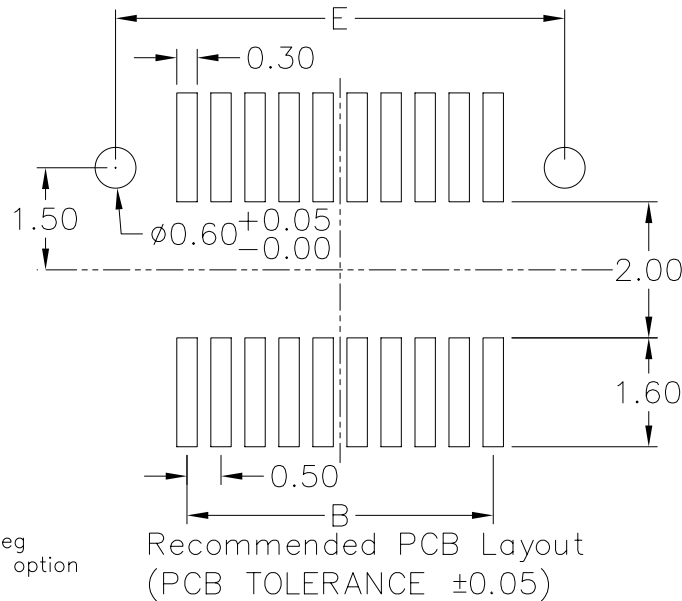

NOTE: HARMFUL MATERIAL SHOULD BE COMPLIANT TO Doc."EI-0005" STANDARDS.

Rev.	ECN Number	Description	Drawn	Date
3	EC2-4A0392	新增 60 PIN 有導樣品	洪銀雯	10/21/04'
4	EC2-4C0136	新增 60 PIN 有導量產	陳顯鑫	12/08/04'
5	EC3-5B0086	新增 50 PIN 有導量產	伍沂峰/詹益東	11/28 05'



GENERAL TOLERANCE	
XX. ± 0.50	XXX. ±
X. ± 0.30	.XXX ±
.X ± 0.25	X.° ± 4°
.XX ± 0.20	.X° ± 4°

SCALE	8=1
UNIT	MM
SIZE	A4/X

ORIGINAL DRAWN	邱若婷	DATE	22-04-04'
CHECK	林錫錦	DATE	11/28 05'
APPROVE	林錫錦	DATE	11/28 05'

DWG. NO.	X-XX
PARTS NO.	ZVG-XXS1-X-X-*

TITLE	0.50 pitch Board to Board plug Type
	(成品規格圖)

REV.	5
SHEET	1/1