


No. of Contacts	DIMENSIONS	
	A	B
1		2.54
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

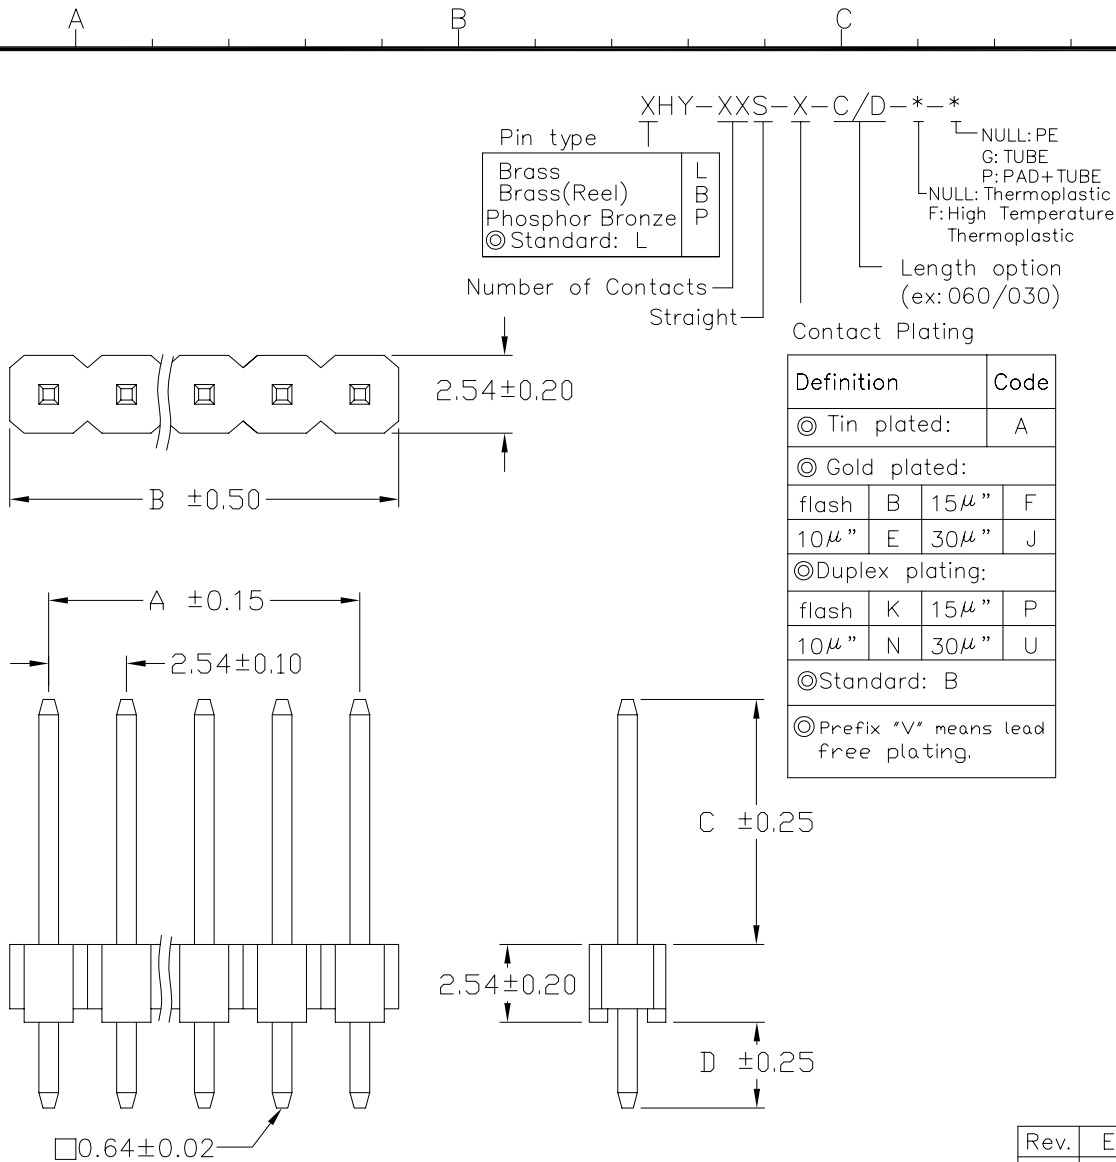


SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms Min.  
 Dielectric withstanding: AC 1000 V  
 Operating Temperature: -40°~+105°C  
 Contact Material: Copper Alloy  
 Insulator Material: Thermoplastic,UL 94V-0 (P.B.T)  
 Color : Black

Finish: Tin,Gold or Duplex plated  
 ◎Standard: Gold flash all over  
 ◎Note:  
 Duplex plating: gold plated on contact area, Tin on solder area  
 ◎ For illustration purpose the XHY-XXS-X-060/028 was shown

Recommended PCB Layout (PCB TOLERANCE ±0.05)



**特殊規格**

針長尺寸  
 如圖所示

Rev.	ECN Number	Description	Drawn	Date
53	EC2-560052	新增XHY-XXS-X-032/068-*	詹益東	06/09 05'
54	ECR-5A0026	修正包裝袋碼	詹益東	10/13 05'
55	EC3-630038	整理圖面 (重新排序)	詹益東	03/10 06'



GENERAL TOLERANCE	SCALE 1=1	ORIGINAL DRAWN 陳美竹	DATE 03/07/30	DWG. NO. 3-41	TITLE	REV. 55
XX. ± 0.50 XXX. ±	UNIT MM	CHECK 林錫錦	DATE 03/10 06'	F:\DWG\CDWG\HY\HYS9B.DWG	2.54mm HEADER (成品規格圖)	SHEET 1/3
X. ± 0.30 .XXX ±	SIZE A4/4	APPROVE 林錫錦	DATE 03/10 06'	PARTS NO. XHY-XXS-X-C/D-*-*		
.X ± 0.25 .X° ± 4°						
.XX ± 0.20 .X° ± 4°						